

UP-FLOW UNCASED COILS ASUC(P)-A & ASUC (P)-M



STANDARD FEATURES

HEAVY RIFLED COPPER TUBING
ALUMINUM FINS
HEAVY ALUMINUM END PLATES
DUAL RATED FOR R-22 AND R-410a
PRESSURE TESTED TO 450 LBS.
POLYMER DRAIN PAN
PITCHED DRAIN PAN WITH HEAT SHIELD
METERING DEVICE IS ACCESSIBLE
FROM PLENUM EXTERIOR


OPTIONAL FEATURES

RIGHT HAND DRAIN CONNECTIONS
RIGHT HAND REFRIGERANT CONNECTIONS
GALVANIZED STEEL OR NYLON DRAIN PANS
A CHOICE OF THERMAL EXPANSION VALVES
HEAT PUMP (P) COMPATIBLE
5 DIFFERENT COIL WIDTHS
ENHANCED ALUMINUM FINS
ANTI-MICROBIAL DRAIN PANS



5-YEAR LIMITED WARRANTY AGAINST COIL LEAKAGE
5-YEAR LIMITED WARRANTY AGAINST DRAIN PAN BREAKAGE
1-YEAR LIMITED PARTS WARRANTY

UP-FLOW UNCASED COILS ASUC(P)-A & ASUC (P)-M

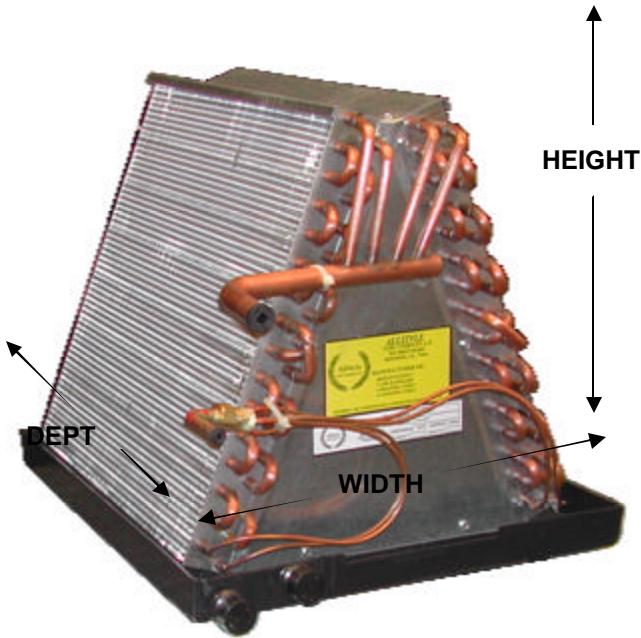

Specify coil width needed when ordering.

Example: ASUC24-A264T+D-5LH

Specify left or right hand
refrigerant and drain connections.

Example: ASUC24-A264T+D-5 LH

To specify a heat pump coil, when ordering add
"P" (heat pump) in the coil model number.

Example: ASUCP24-A264T+D-5LH

3/4" MPT primary & secondary drain connections

3/8" liquid line connection

Refrigerant suction line connections:

1.5 to 3.0 ton 3/4"

3.5 to 5.0 ton 7/8"

UNCASED COIL DIMENSIONS			
Coil	Uncased	Uncased	Uncased
Width	Depth	Width	Height
Code			
5	19.50"	13.00"	****
6	19.50"	15.00"	****
7	19.50"	17.00"	****
8	19.50"	20.00"	****
9	19.50"	24.00"	****

Coil Height will vary depending on the coil used.

Call AllStyle for specific information about
your application.

Specifications may change without notice.